


# XD10

High productivity & precision 5/6-axis solution  
for max. dia. 10mm

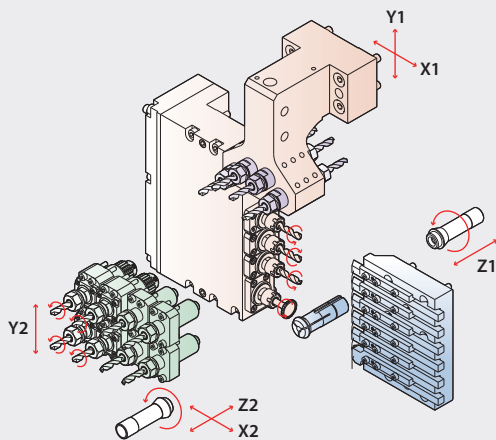


Model	XD10	
NC	Hanwha Fanuc-i	
Max. machining diameter (mm)	Ø10	
Z1 Stroke (mm)	155	
Main spindle	Speed (rpm)	15,000
	Motor (kW)	2.2/3.7
Turning tool	No. of tools	□8mm x 6
Front tool	No. of tools	ER11 x 4
Cross drill	No. of tools	ER11M x 4 (Option: ER11M x 5)
	Speed (rpm)	10,000
	Motor (kW)	0.55
Sub spindle	Speed (rpm)	10,000
	Motor (kW)	0.55 / 1.1
Back tool	No. of tools	ER11 x 8 (Y2: Fixed 4 + Driven 4) (Option: Fixed 2 + Driven 2)
	Speed (rpm)	9,000
	Motor (kW)	0.55
Machine size (L x W x H) (mm)	1,810 x 1,150 x 1,770	
Weight (kg)	2,200	
Power consumption (Cable size)	4.6kVA, 3.7kW (VCTF 10SQ x 4C)	
Air flow rate (Liter/Min)	120 ~ 150	

## OPTION TOOLING


### Whirling Tool

- ER11M x 2
- Modular Whirling x 1




### Cross unit 4 (modular 1)

- ER11M x 3
- Modular ER11M x 1




### Back tool 8 (Driven max. 4)

- ER11 x 8



### Back tool 4 (Driven max. 4)

- ER11 x 4



## Dimension

